



FEATURES

- 80 PLUS Platinum
- Internal OR'ing
- High Power Density 26.37 W/in³
- Active Power Factor Correction
- EEPROM for FRU data
- NEBS Level 1 Compliance to support networking equipment
- Support PMBus
- N+1 Redundant

CPR-7011-7M1

- Dimension : 220 x 54.5 x 40 mm (D x W x H)
- Total Max Power : 700W




UL , cUL , TUV , CB , CE , CCC , BSMI , FCC class A , CISPR Class A , RoHS

INPUT SPECIFICATIONS	
Input voltage	90 - 264Vac
Input frequency	47 - 63 Hz
Input current	100 - 240Vac / 9.0 - 4.0A

GENERAL SPECIFICATIONS	
Hold-up time	12ms @ 75% Load
Efficiency	Minimum 94% @ 50% Load
MTBF	100,000 hours at 50 degree C

ENVIRONMENTAL SPECIFICATIONS	
Temperature	0 to 50 degree C Operating
Altitude	16,500 feet Operating
Relative humidity	20% to 90% RH Operating

OUTPUT SPECIFICATIONS		
Voltage	+12V	+5Vsb
Regulation	±5%	±5%
Max Load	58.3A	3.0A
Ripple & Noise	120mVp-p	50mVp-p

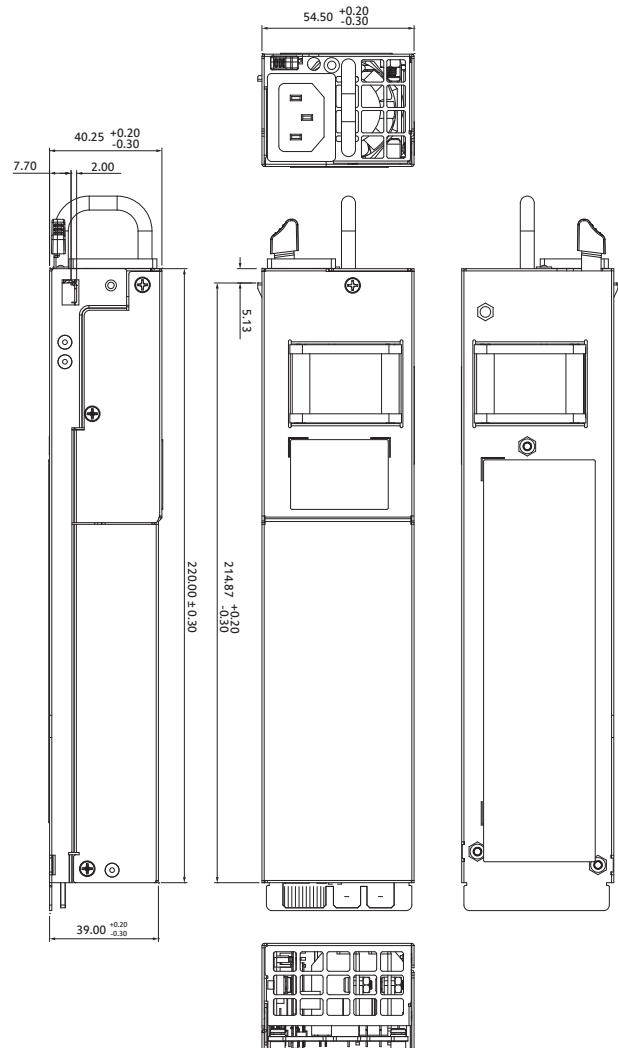

Note :

- 1.The total output power shall not exceed 700W continuously for 90 to 264VAC input.
- 2.During load changes from minimum to maximum or maximum to minimum the unit must not shut down.